




BLU Studio 5.0 II Power Button Replacement

Use this guide to replace the power button.

Written By: Ricardo Sarabia

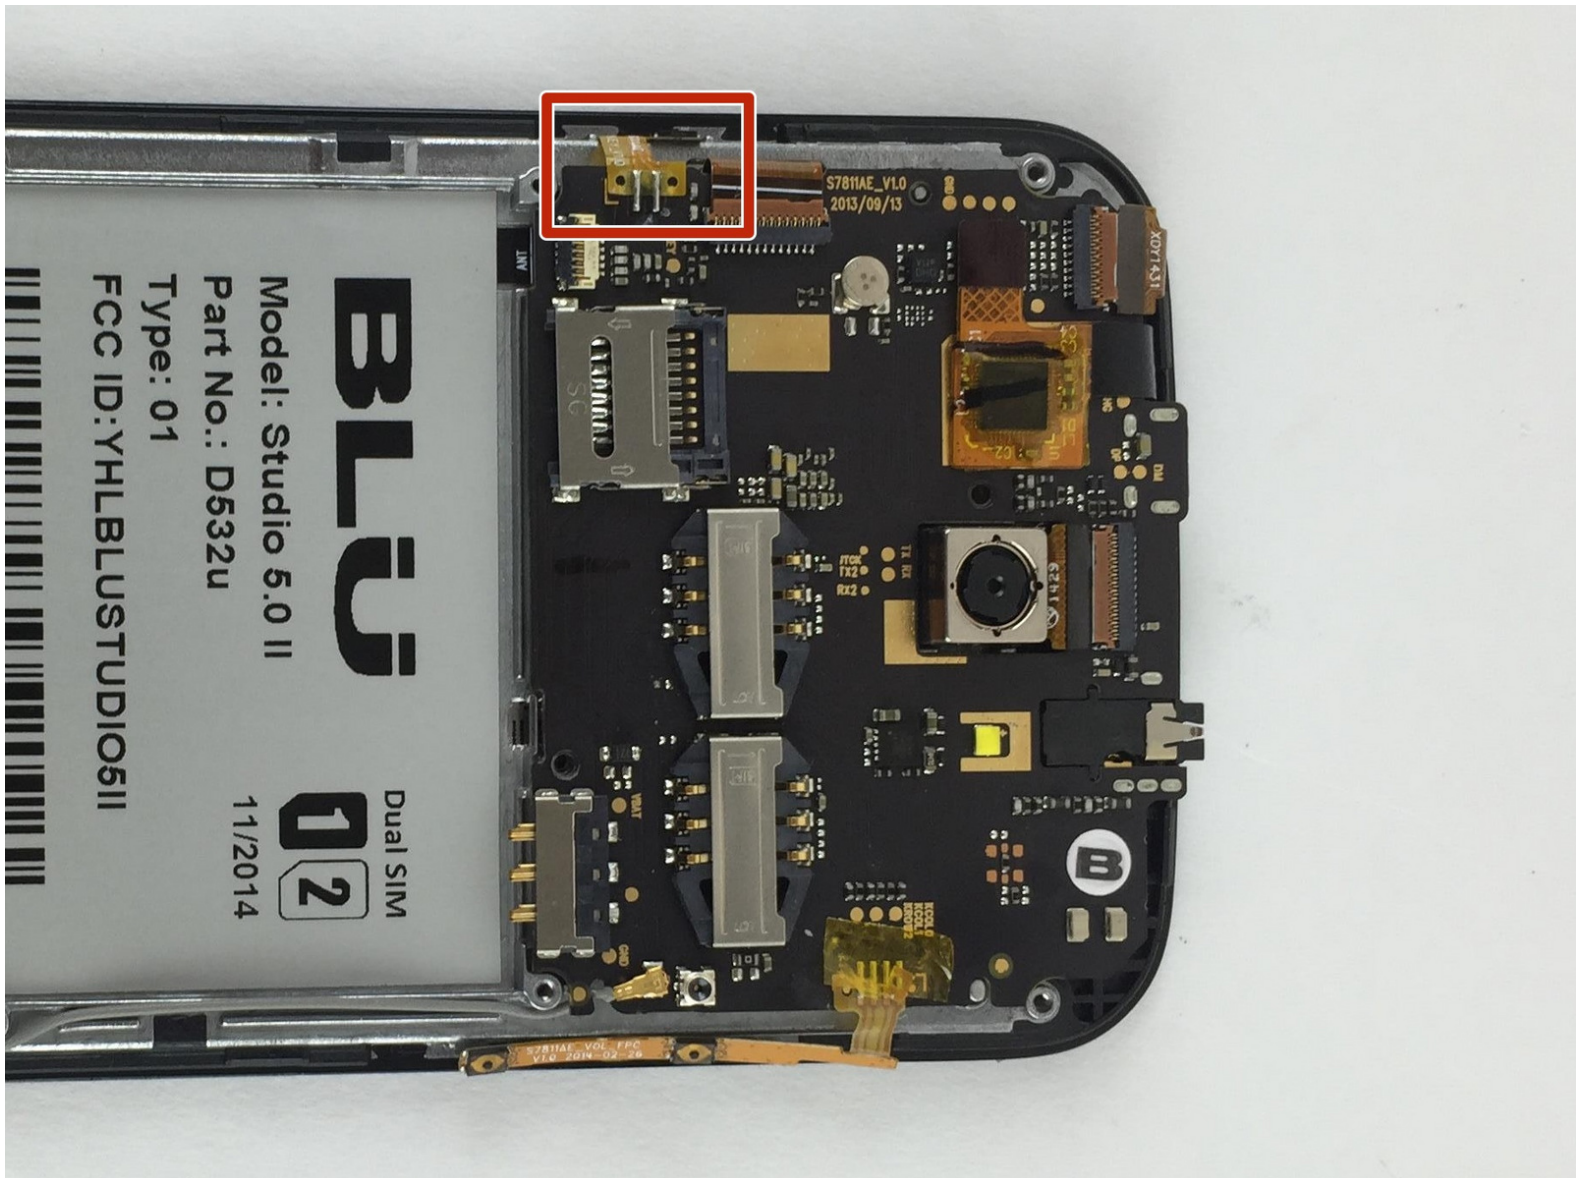

INTRODUCTION

This guide will teach you how to replace the power button on your BLU Studio 5.0 II phone.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery



- ⚠ Turn off your phone before disassembling the device.
- Locate the small opening on the bottom corner of the back case.

Step 2



- Use your finger to open the back case by slowly pulling it on the open slot.
- Once the case is lifted on the corner, slide your finger along the edge of the phone to remove the rest of the case.

Step 3




- Locate the opening slot at the bottom of the battery.
- Use your finger to lift the battery and remove it from the case.

Step 4 — Back Case




- Locate the four 3mm screws on each side of the back panel.
- Use a Phillips #00 screwdriver to remove the eight screws.

Step 5

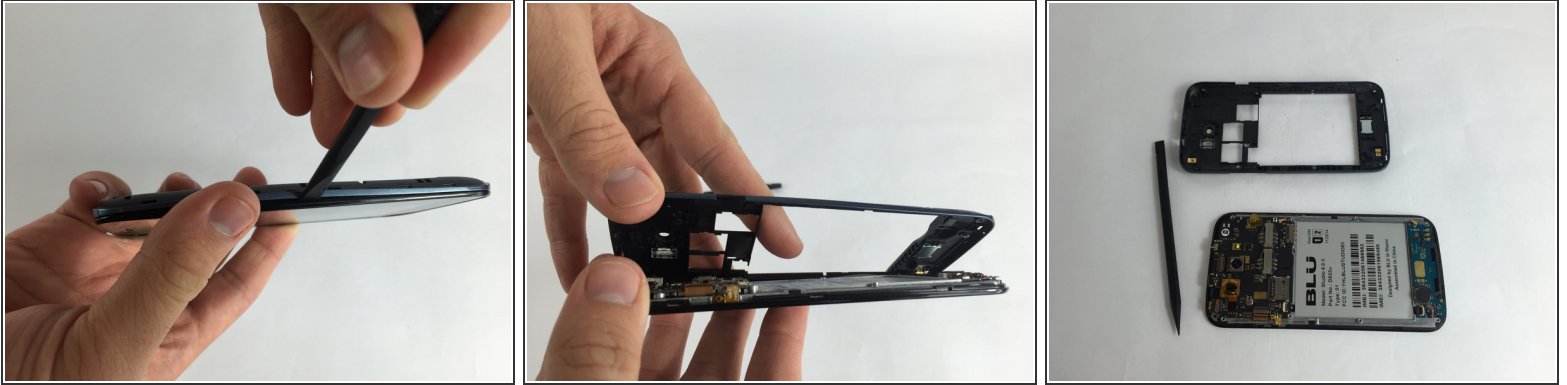

- Carefully use a spudger to start opening the back case by inserting it between the black and blue lines on the side of the phone.
- With the help of your fingers, continue to remove the back case by sliding it through the opening.

Step 6 — Power Button

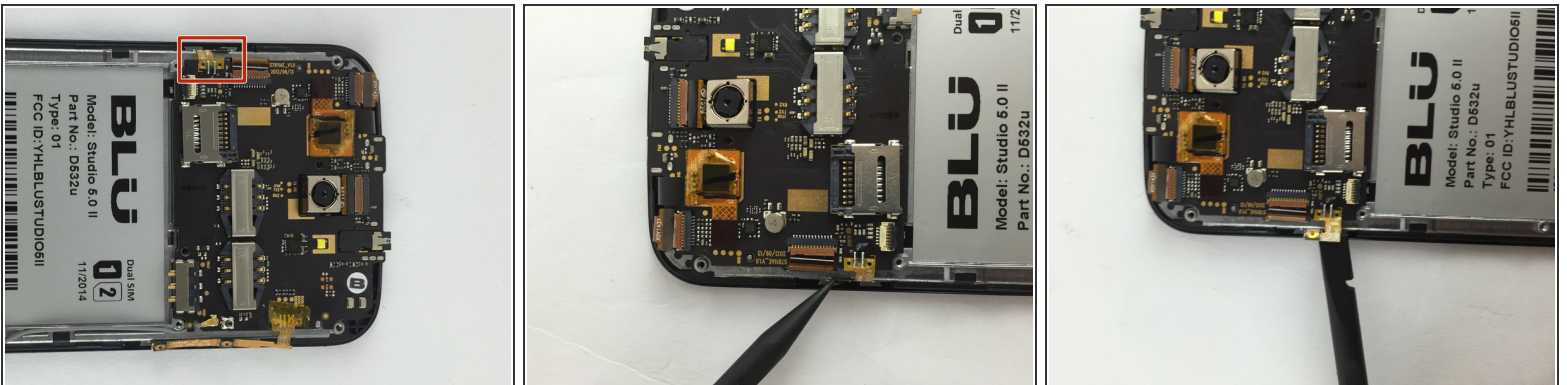

- Locate the power button on the left side of the motherboard.
- Using a spudger or a pair of tweezers, carefully remove the power button yellow film attached to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 03:52:04 AM.